



PTFE Chemical Transfer Hose-Smooth Bore With Annular Corrugating and Wire Braid (Class 150)

Nominal I.D.	Working Pressure (psi)		Min. Bend Radius	Vacuum (in. hg.)		PTFE Thickness	Min. Length for 3/4" Offset	Flange Thickness
	@ 70° F	@ 350° F		@ 70° F	@ 350° F			
1"	275	195	12	FV	FV	.130	15	5/8"
1 1/2"	275	195	15	FV	FV	.150	21	5/8"
2"	275	195	21	FV	FV	.160	25	5/8"
3"	275	195	28	FV	FV	.160	35	5/8"
4"	230	195	46	FV	FV	.160	41	5/8"
6"	230	195	65	22	17	.275	72	3/4"
8"	185	160	89	20	17	.220	96	7/8"

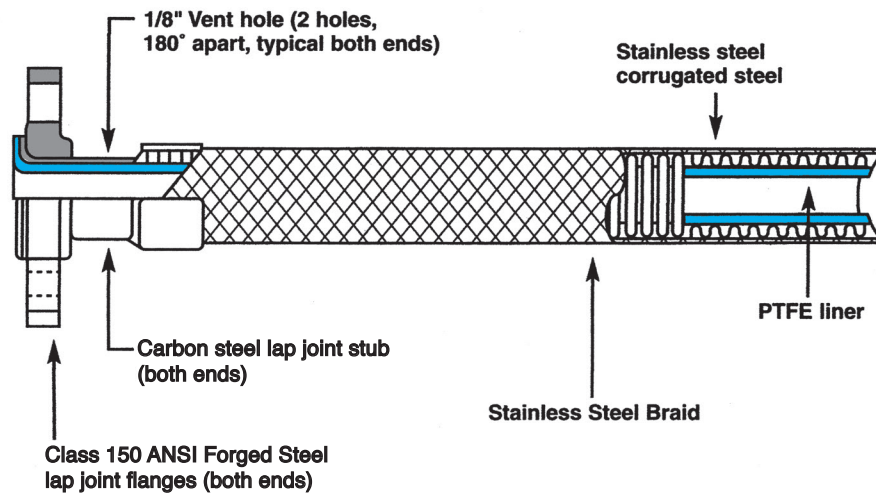

Jacketed Pipe & Fittings

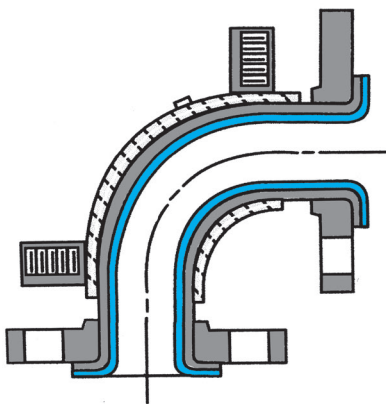

Ideal for circulating hot or cold liquid to control process conditions. Both inside and outside pipes are schedule 40 steel. Flanges are standard lap joint style as pictured below. Jacket can be extended to the flange, if required.

Carrier Size	Jacket OD (A)
1"	2 3/8"
1 1/2"	3 1/2"
2"	4 1/2"
3"	5 9/16"
4"	6 5/8"
6"	8 5/8"
8"	10 3/4"

Standard fitting geometries are also available in jacketed style. Consult factory.

